


CUSTOMER INFORMATION

NAME \_\_\_\_\_ TITLE \_\_\_\_\_  
 COMPANY \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP CODE \_\_\_\_\_

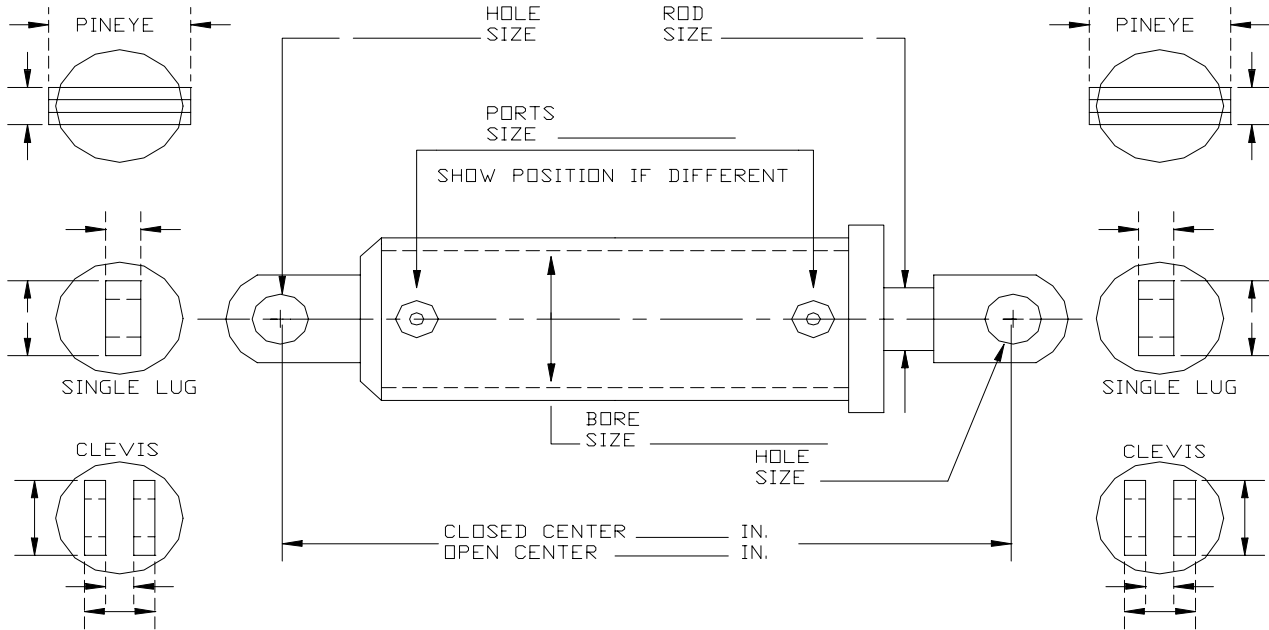

BORE \_\_\_\_\_ X STROKE \_\_\_\_\_ X ROD \_\_\_\_\_

HEAD STYLE:  HEAD CAP  
 INTERNAL THREADS  
 OTHER

TYPE:

DOUBLE ACTING  
 PUSH LOAD \_\_\_\_\_ LBS  
 PULL LOAD \_\_\_\_\_ LBS  
 SINGLE ACTING  
 PUSH LOAD \_\_\_\_\_ LBS  
 PULL LOAD \_\_\_\_\_ LBS

DISPLACEMENT  
 POSITIVE RAM STOP  
 NO RAM STOP

PORTS: SIZE \_\_\_\_\_  
 NPTF  SAE 4-BOLT  
 SAE "O" RING  OTHER

PRESSURE:  
 2000 PSI  CUSHION  
 3000 PSI  NO CUSHION  
 OTHER \_\_\_\_\_

ROD MOUNT:

PLAIN  
 FEMALE THREAD  
 MALE THREAD  
 CROSS HOLE DIA \_\_\_\_\_  
 SELF ALIGNING BEARING \_\_\_\_\_ I.D.  
 ROD EYE  
 CROSS TUBE  
 \_\_\_\_\_ I.D.  
 \_\_\_\_\_ LENGTH  
 PINEYE  
 OTHER (SEE SKETCH)

TUBE MOUNT:

NONE  
 REAR FLANGE  
 FRONT FLANGE  
 SINGLE LUG  
 CLEVIS MOUNT  
 PINEYE OR CROSS TUBE  
 OTHER (SEE SKETCH)

PLEASE SEND A DRAWING OF THE CYLINDER IF AVAILABLE