SER FS **LIFTING EXPECTATIONS**







SERCOLOADERS.COI

Hydraulic System

- Triple gear pump.
- Operating pressure: 2,450 PSI.
- Stack type control valves located under seat.
- 55 gallon in-frame hydraulic oil reservoir with high-capacity, 10 micron return filter and removable access cover.
- Four-wire reinforced hydraulic hose in all pressure applications.

Options

- Various grapples and attachments.
- Remote truck frame mounted hydraulic oil reservoirs.
- Hydraulic oil coolers.
- Continuous rotation with hydraulic collector.
- LED light kits.
- Telescopic boom.
- Mechanical outboard joystick control package.
- Operator's cab.
- Seat belt included.
- Magnet generator packages.




SERCOLOADERS.COM


LIFT DIAGRAM

Capacities shown are maximum theoretical lift capacities based on loader system pressure rating indicated, loader is mounted on adequately sized vehicle, stabilizers deployed in down position and the entire unit is on firm, level ground.

160 Series

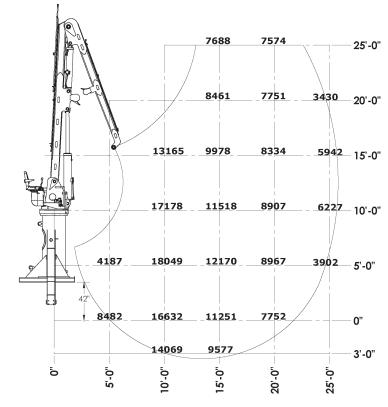

160PH Series

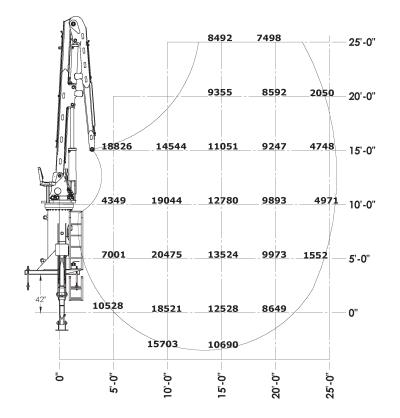

NOTES

	 <u> </u>
	·



YOUR NEW LOADER AWAITS!

CONTACT OUR TEAM TODAY!

(218) 834-5118 serco@sercoloaders.com sercoloaders.com

